JNJ Antenna Install Guide
IQMC412



Drill a 1/2 inch hole where the antenna is to be mounted



Remove nut and lock washer from JNJ antenna body

Thread all eight cables thru the drilled hole



Put on lock washer followed by the nut on the underside of JNJ antenna body and secure tightly so antenna body sits flush with surface and doesn't spin

Attach labeled cable leads to proper SMA connections on the IQMC412 router body per diagram below (the GPS and one 5G cable will not be attached, and all IQMC412 antenna paddles must be removed prior to connecting)

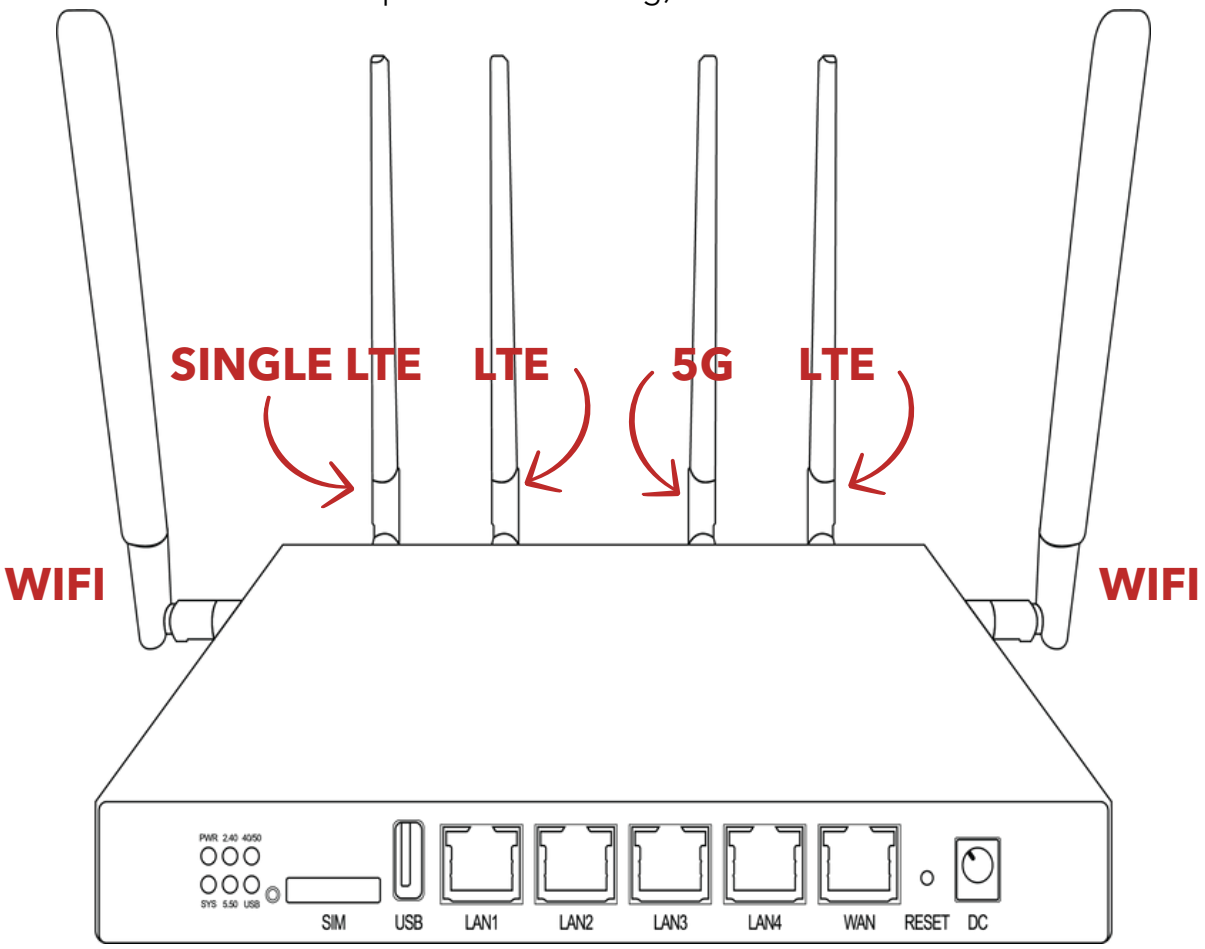

IQMC 412 JNJ Antenna SMA Placement