JNJ Antenna Install Guide
IQMC520



Drill a 1/2 inch hole where the antenna is to be mounted



Remove nut and lock washer from JNJ antenna body

Thread all eight cables thru the hole



Put on lock washer and then nut back on the underside of JNJ antenna body and secure tightly so antenna body sits flush with surface and doesn't spin

Attach labelled cable leads to proper SMA connections on the IQMC520 router body per diagram below (the GPS cable will not be attached, and all IQMC520 antenna paddles must be removed prior to connecting)

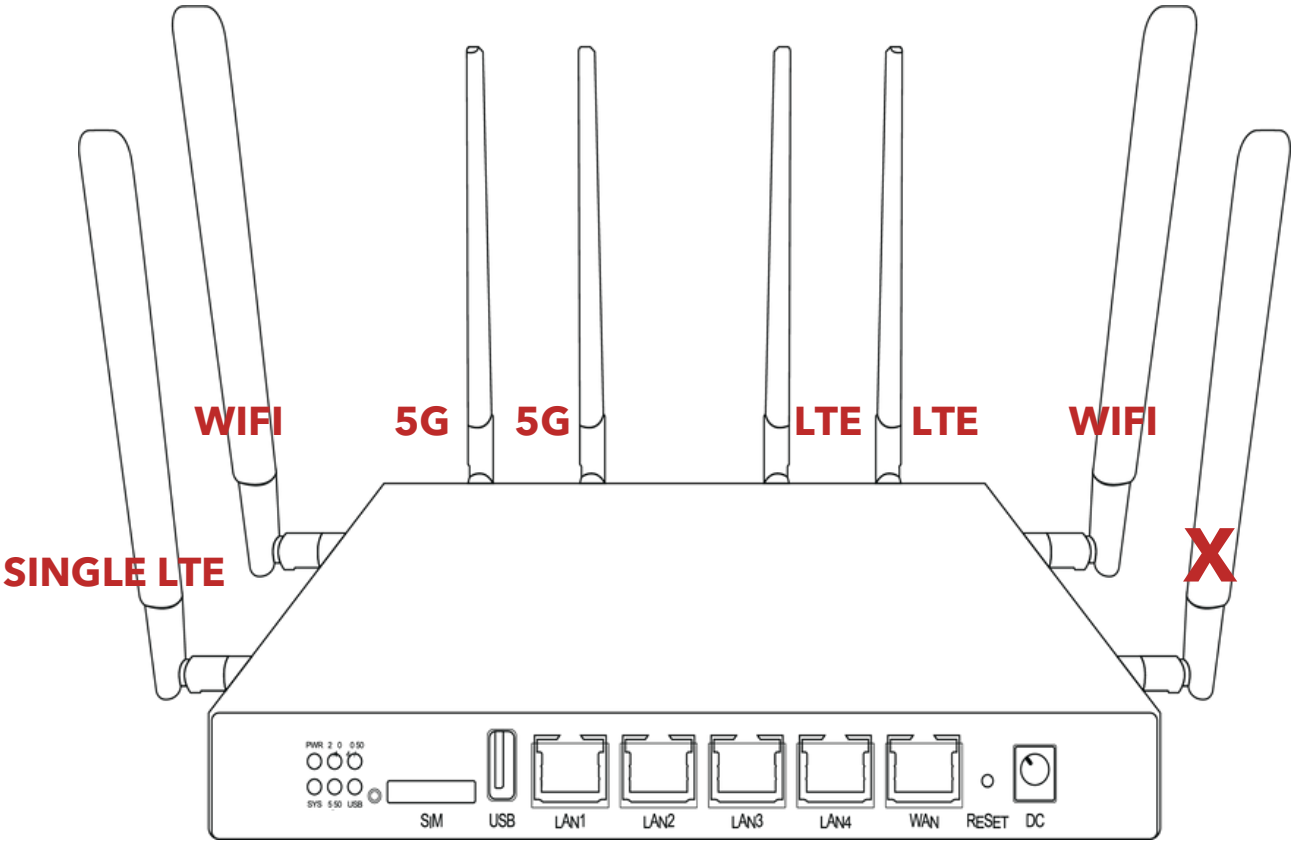

IQMC 520 JNJ Antenna SMA Placement