Best Practice

Tag Mounting & Installation

Important Note:
Application of the UHF Exterior Tag or vehicles may be subject to local legislation. Please verify if legal restrictions apply in your region. We advise to mount the tags on the same side as where the long-range reader is positioned. Compliance with these instructions is important and strongly recommended in order to ensure proper operation of the system.

Tag Installation Guide:
For full installation notes please visit our Partner Portal at www.portal.nedapidentification.com

Windshield Sticker Tags

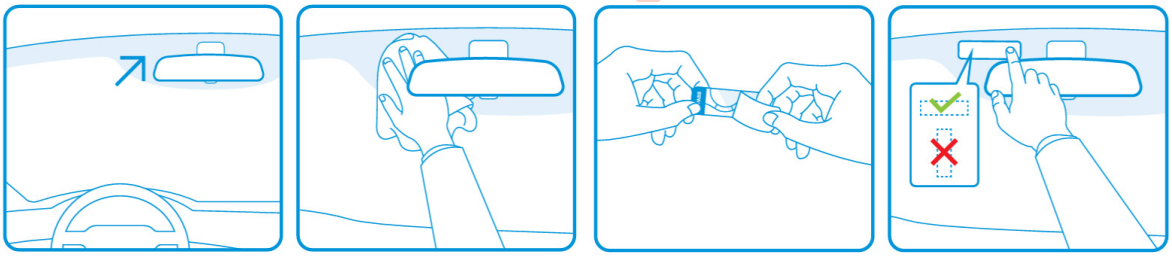

Important Note:
We advise the mounting of the tag on the same side, keeping towards the middle, as where the long-range reader is positioned. In case of metalized windshield, we advise the placement of the UHF windshield Tag 2 inches from the top of the window and 0-4 inches from the rearview mirror to ensure the performance of the Windshield tag. Usually, vehicles with metalized windshields (solar control coatings) have a non-metalized communication window behind and on either side of the rearview mirror of the vehicle. For more specific information, please reference your vehicle owner manual or contact your dealership. Compliance with these instructions is important and strongly recommended in order to ensure proper operation of the system.

External Sticker Tags

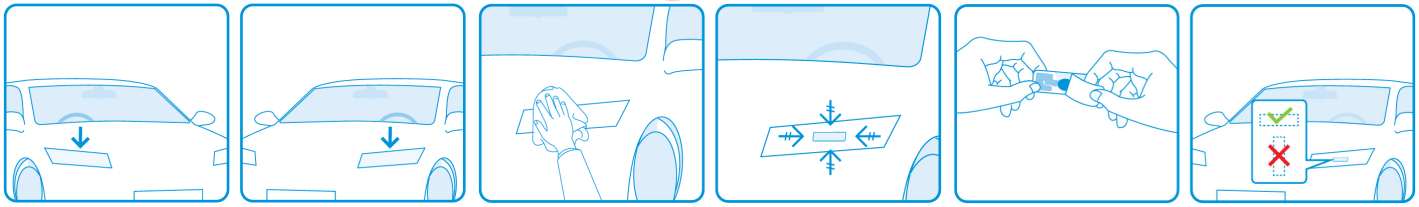

Best Practice is to have at least one package of external sticker tags on hand as higher end vehicles will have metalized content in the recommended application area for the Windshield Sticker tags.

Customers have had success placing the External Tags on other non-metal surfaces of the vehicle. We highly recommend testing to see if desired results are achieved before permanently affixing the tag to the location.

Best practice is to mount the reader 4-6 ft. above the highest tag placement and angled down and across.